

## Zero Setup, Multi-memory profiler

The new Solderstar SLX is an accurate, robust, ultra-compact, battery powered datalogger used for measuring and recording process parameters from any soldering process.

Requiring minimal user setup the SLX unit can be docked onto any SMARTLink reflow heatshield or other process accessory and the system will auto-configure itself for data capture.

The logger, sensor and memory status are displayed conveniently for the user via status indicators and a multi-bar graph display.

The new unit features many improvements and real performance, with USB download speeds 10 times faster than previous models, 2.4Ghz telemetry options along with increased measurement range all while still maintaining +/- 0.5 C accuracy.

The SLX can be ready to profile from as little as a **ten minute** charge from your PC, and has an impressive 15 hours profiling time from a two hour USB charge. The new internal high temperature battery system is user replaceable and can be changed if required in seconds.

### New Features


- Zero user setup for error free data capture
- Ultrafast USB downloading + 2.4Ghz Wireless Telemetry option
- User replaceable high temperature battery
- Multiple memories for profile storage
- Automatic thermocouple and temperature status checking
- +/- 0.5°C accuracy from -200 to 1372 °C

## Datalogger

Size/Weight	125mm x 52mm x 9.5mm, 110g
Channels	12 - Type K
Memory	Flexible 1 million data points
Sampling	0.05s to 10 Minutes
Measurement Range	-200 to 1372°C (-328 to 2501 °F)
Accuracy	±0.5 °C (0.9°F)
Resolution	±0.026 °C (0.046°F)
Max. Internal Temperature	+85 °C (Auto Shutdown on over temp.)
Power	Rechargeable High Temperature Nimh
Communications	1 Megabit USB or 2.4Ghz Wireless
Thermocouples	Type K, EN 05842:1993 Class 1 / ANSI MC 96.1


## Reflow Heatshields

Material	Stainless Steel
Size (LxWxH)	6/9 Channel Version: 310mm x 80mm x 25mm 12 Channel Version: 310mm x 104mm x 25mm

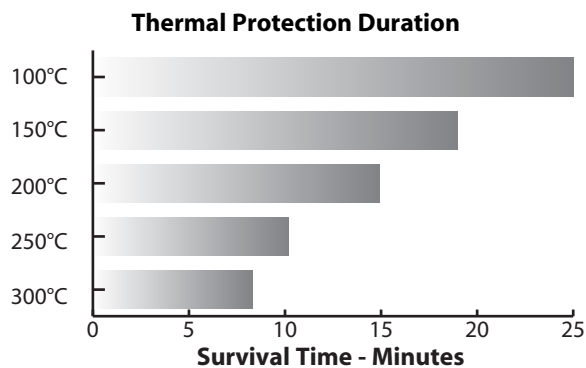

Other heatshield sizes are available for special process requirements.

### Thermocouple Adapters available in 6,9 or 12 Channel versions

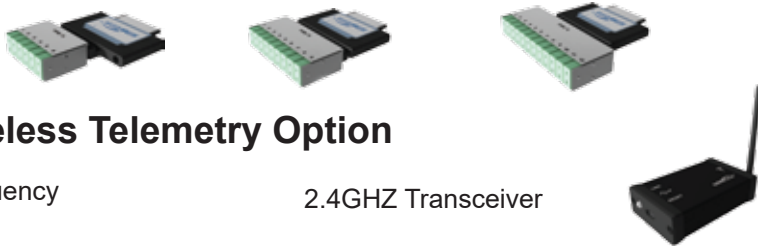

## Wireless Telemetry Option

Frequency	2.4GHZ Transceiver
Channels	128 Individual Channels
Protocol	Zigbee PRO - Duplex Transmission

## Software

Compatibility	Windows™ XP Vista/Windows 7/8/10 32 & 64 Bit
Language Support	English, French, German, Italian, Portuguese, Russian, Spanish & Chinese

For demonstration software visit [www.solderstar.com](http://www.solderstar.com)

## Standard Equipment

- Solderstar SLX datalogger
- Thermocouple Adapter
- 25mm Lead Free capable heatshield
- Type K thermocouples
- PC Analysis software
- Hard copy manual + 1 Year calibration certificate
- Equipment case

## Optional Reflow Equipment

- AUTOSeeker Profiler Optimisation software
- 2.4Ghz Wireless Telemetry
- Deltaprobe Oven Verification fixture
- Adjustable Reflow Carrier

## Additional Process Support

A range of process specific accessories are available to extend the system for use with Reflow, Wave/Selective Soldering and Vapour Phase processes.

Specification subject to change without notification

# For more information contact your regional Solderstar office



Solderstar Ltd  
Unit C2 - Castle Park Industrial Estate  
Bower Street, Oldham, UK OL1 3LN  
Tel: +44 (0)1706 354846  
Fax: +44 (0)1706 675296  
Email: [info@solderstar.co.uk](mailto:info@solderstar.co.uk)



Solderstar LLC  
4500 140th Avenue North, Suite 101  
Clearwater, FL 33762, USA  
Tel: + 1 (727) 461 2270  
Fax: +1 (727) 538 4237  
Email: [info@solderstar.com](mailto:info@solderstar.com)



Solderstar (Germany)  
Dehmer Str. 48  
32549 Bad Oeynhausen, Germany  
Tel: +49 5731 3002811  
Fax: +49 5731 3002814  
Email: [info@solderstar.de](mailto:info@solderstar.de)